YATAY SAC PLAKA KALDIRMA APARATI / HORIZANTAL PLATE CLAMP		NL-HPC 75	NL-HPC 150	NL-HPC 250	
Çiftli kapasite / Capacity per pair		1.5	3	5	t
Test yükü / Proof test load (**çiftli**/ per pair)		22.07	44.13	73.58	kN
Max. ağız açıklığı / Max. jaw opening		25	30	40	mm
Ölçüler / Dimensions	A	0-27	0-32	0-52	mm
	B	125	157	231	mm
	C	50	65	90	mm
	D Max	175	204	310	mm
	E	25	30	40	mm
Ağırlık / Weight (**Tek**, single)		2.4	3.9	13.4	kg
Ağırlık / Weight (**Çift**, pair)		4.8	7.8	26.8	kg

Art.No. 52000066 **NL-HPC 75**

Art.No. 52000067 **NL-HPC 150**

Art.No. 52000068 **NL-HPC 250**

- **Çift olarak kullanılması gereken bu sac kaldırma aparatları saçları yatay olarak yükleme ve kaldırmada büyük kolaylık sağlar.**
- **2 bacaklı bir zincir sapanın ucuna takılmaları (max. açı 90°) sacları yatay kaldırmak için yeterlidir.**
- **Saclar uzun tarafından kaldırılmak istenirse zincir sapan bir kaldırma traversine monte edilmelidir.**
- **Önemli: Zincir sapanın max. kaldırma açısı 90° olmalıdır.**
- **Makine Emniyet Yönetmeliği 2006/ 42 EC'ye uygun üretilmiştir.**
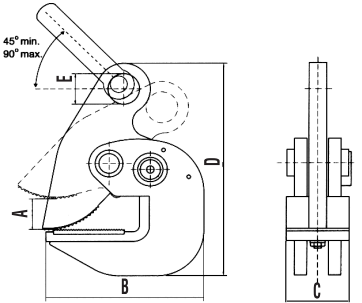
- Used inpairs this range of clamps is ideal for loading and moving plate materiel in the horizontal position
- A single pair of clamps fitted to a two leg chain sling (maximum sling angle 90°) is all that is required for lifting short lengths of plate
- For long plates, 2 pairs of clamps suspended by chain from a lifting beam must be used
- Important: Maximum sling angle is 90°
- Manufactured according to machinery directive 2006/ 42 EC